
# Product data sheet
## Characteristics

# NSYCCOTHO
## ClimaSys CC - simple thermostat 250V - range of temperature 0…60°C - NO - °C

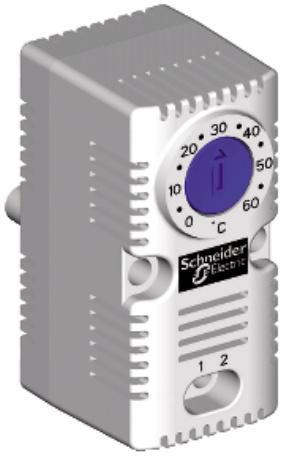


### Main

| | |
|---|---|
| Range | ClimaSys |
| Product name | ClimaSys CC |
| Product or component type | Simple thermostat |
| Temperature setting range | 0...60 °C |
| Information displayed | Temperature in °C |

### Complementary

| | |
|---|---|
| Input voltage | 250 V |
| Sensor type | Bimetal |
| Contacts type and composition | NO |
| Contact resistance | < 10 mOhm |
| Service life in cycles | >= 100000 cycles |
| Maximum switching capacity | 10 A 250 V AC resistive<br>15 A 120 V AC resistive<br>30 W DC<br>2 A 120...250 V AC inductive pf: 0.6 |
| Electrical connection | 4 terminals 2.5 mm² |
| Mounting mode | Clipped |
| Height | External : 68 mm |
| Width | External : 33 mm |
| Depth | External : 44 mm |
| Product weight | 40 g |
| Mounting location | On mounting plate<br>35 mm DIN rail<br>Spacial upright<br>Cross rails |
| Ambient air temperature for operation | -20...80 °C |
| IP degree of protection | IP20 |
| Hysteresis | 7 % |
| Number of outputs | 1 output(s) ventilation function |
| Material | PC |
| Colour | Light grey |
| Flame retardance | Self-extinguishing conforming to UL94 (material V0) |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|---|---|
| Product certifications | UL |

## Offer Sustainability

| | |
|---|---|
| RoHS (date code: YYWW) | Compliant - since 0940 - Schneider Electric declaration of conformity<br>Schneider Electric declaration of conformity |
| REACh | Reference not containing SVHC above the threshold<br>Reference not containing SVHC above the threshold |

## Contractual warranty

| | |
|---|---|
| Warranty period | 18 months |